
LAMININ®
PAINTS
BLUE
IN ANY COLOUR
www.laminincoatings.co.za

LAMININ

a South African developer and manufacturer of a wide range of decorative, waterproofing and light industrial **paint products**.

Accumulated experience, **since 1981**, allows Laminin Coatings to act as a vehicle for innovative and sustainable paint manufacturing.

Our ethos is inspired by the bonding action of the **Laminin cross-link molecule**, building a foundation for a multi-faceted paint experience.

For a complete product range, data specification & distribution, please visit:
www.laminincoatings.co.za

Discover Laminin

Make Laminin your **FIRST** choice in paint

Join our loyalty program and be the **FIRST** to know about new products, specials and surprises:

www.laminincoatings.co.za



RESPONSIBLE LIVING

- Manufactured and invested in South Africa.
- Low VOC technology, APEO & formaldehyde free formulations.
- Broad spectrum anti bacterial, mould and fungal protected coatings.
- Complies with the South African legal lead limit of 90ppm or less.
- Upcycled containers.
- Sustainable growth, energy & water solutions.

BLUE IN ANY COLOUR

NCS Natural Colour System

AGRÉMENT SOUTH AFRICA innovative construction product assessments

GREEN BUILDING COUNCIL SOUTH AFRICA

SAPMA

SABS ISO 9001

INDEX

01-02 **Blue range**
Interior & exterior top coats with premium stain resistance and broad spectrum anti-bacterial protection

Luxurious satin sheen 03-04
Fully washable for interior and exterior use

05-06 **Interior & exterior smooth low sheen**
Resilient coating with anti mould and fungal protection

Washable low sheen for walls & ceilings 07-08
Hides minor imperfections

09-10 **Smooth matts**
For walls and ceilings

Exterior textured coatings 11-12
Lap mark free, dust and dirt proof

13-14 **Weatherproof matt texture**
Bridge hairline cracks to prevent moisture ingress

Premium roof coating 15-16
Low sheen finish

17-18 **Roof & Paving coating**
Smooth matt colourfast

Smooth matt waterproof finish 19-20
Agrement certified coating

21-22 **Waterproof & rubberizing**
Top coats and sealers

Alkyd/Enamel Coatings 23-24
Where smooth durability is required

25 **Direct to metal**
Quick dry, corrosive resistant top coats

Quick dry enamel 26
Heavy duty, corrosive resistant top coat

27 **Floor Coatings**
For high traffic areas

WoodAll 28
Varnishes and sealers

29-32 **FIRST - Preparatory Coatings**
For interior and exterior substrates

Validate your guarantee on • **www.laminincoatings.co.za**

BLUE
IN ANY COLOUR

FRESH & CLEAN FOR LONG
PREMIUM BLOCK AND STAIN RESISTANT

HydroShell
non-yellowing, high sheen water based eggshell, with core-shell technology.

Also available in **HiGlo** with a high gloss finish.



Walls, doors, trims

Apply @
10m² / L / Per coat

Broad spectrum anti-bacterial protection.
Odourless | Fast dry | Non Yellowing.

Apply @
10-12m² / L / Per coat





NCS
Can be tinted to a wide range of colours.

Walls and ceilings, kitchens & bathrooms

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

POTTERS CLAY

CITY FOG

DUSTY CHALK

RIVER REEDS

NATURALIST

COBBLESTONE

BARK CANOE

CANVAS

ROCKY GORGE

BUTTER CREAM

SOFT BEIGE

SOFT FLEECE

SHAPE SHIFTER

SKY WHITE

SYDNEY GREY

LIGHT GREY

MIDNIGHT



Where to use?

Suitably primed new and previously painted stable cement plaster, concrete, porous brickwork, fibre-cement and gypsum plaster.

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Touch

LUXURIOUS SATIN SHEEN

- Low dirt pickup and water resistant for exterior use
- Highly durable stain resistant finish for interior use
- Fully washable
- Low odour for ease of application
- Lifetime interior quality guarantee

Can be tinted to a wide range of colours. NCS

Due to the printing process, colours may vary from the actual paint

Apply @

8-10m² / L / Per coat

RESILIENT

PinAcle

Dry film anti mould and fungal protection

for interior and exterior use



Where to use?

Suitably primed new and previously painted stable cement plaster, concrete, porous brickwork, fibre-cement and gypsum plaster.

Dries to a resilient smooth sheen finish with excellent flow and levelling
Fully washable and stain resistant for **interior use**
Hydrophobic coating, UV and dirt resistant for **exterior use**
Lifetime interior quality guarantee

Can be tinted to a wide range of colours. NCS

15 YEAR QUALITY GUARANTEE SINCE 1951

Apply @

10m² / L / Per coat

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Washable LoSheen

Hides minor imperfections for walls and ceilings

CHILLOUT
WAVE
CREAMY CORN
DESERT
MORNING MIST
CASTLE
SAGE
GATEWAY
ISLAND
STONE CANYON
BAY LEAVES
SEAGULL
MAYAN ROCK
MOONLIGHT



Smooth low sheen finish
Excellent weather resistant properties for exterior use
Fully washable and stain resistant for interior surfaces

LAMININ® PAINTS

10 YEAR QUALITY GUARANTEE SINCE 1921

Apply @

8-10m² / L / Per coat

NCS

Can be tinted to a wide range of colours.

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

Due to the printing process, colours may vary from the actual paint


Apply @
10m² / L / Per coat

Apply @
8m² / L / Per coat

Smooth Matt

Low reflection
Hides minor imperfections
Excellent opacity

Can be tinted to a wide range of colours. NCS

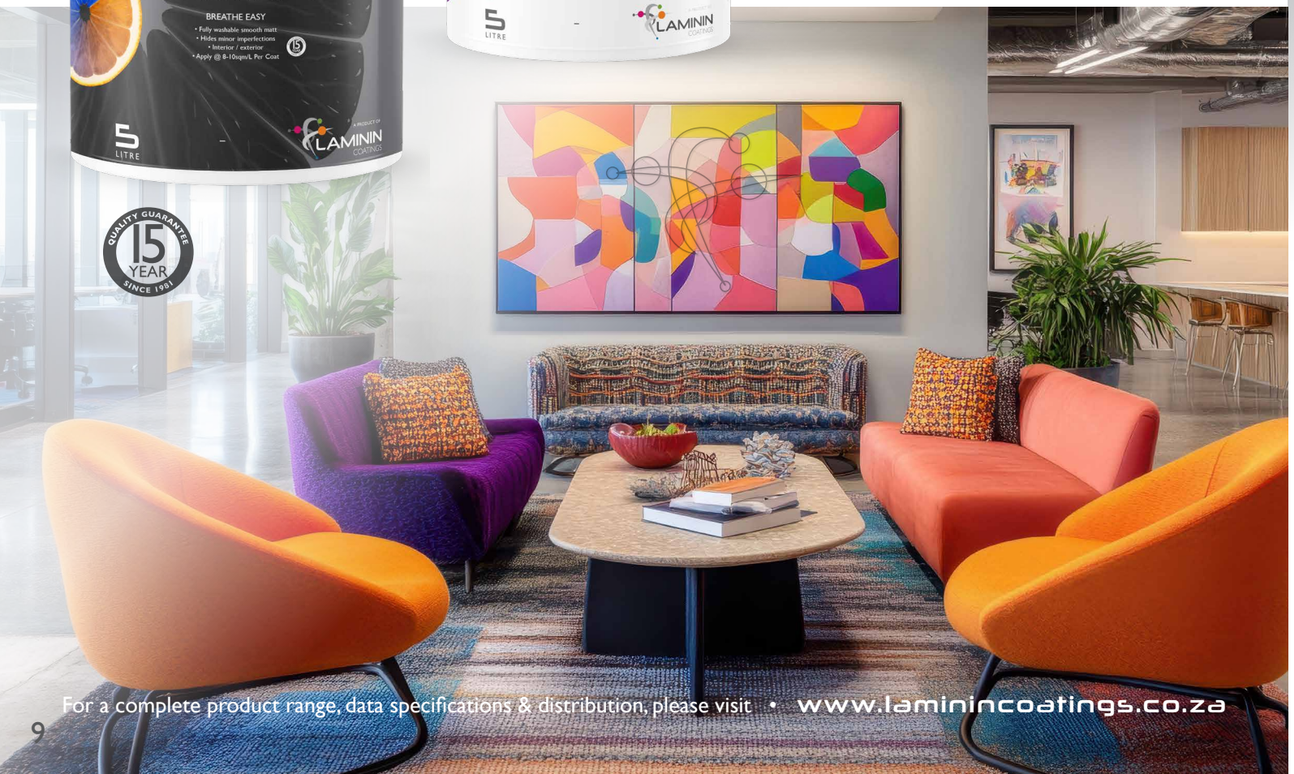

Walls Ceilings

OFF WHITE
LATTE
SOFT IVORY
COCONUT
NEUTRAL
CARAMEL
CARROT
MOROCCO

Apply @
6m² / L / Per coat





Apply @
8-10m² / L / Per coat

QUALITY GUARANTEE 10 YEAR SINCE 1981

Due to the printing process, colours may vary from the actual paint

BaDgr

Dust & dirt proof

15 YEAR QUALITY GUARANTEE

Where to use?

Suitably primed new and previously painted stable cement plaster, concrete, porous brickwork, fibre-cement and gypsum plaster.

- Lap mark free
- Hides minor imperfections
- Bridge fine hairline cracks to prevent moisture ingress
- UV and moisture resistant

Apply @
6m² / L / Per coat

FINE TEXTURE



WHITE | SAND | SHORELINE | ELMWOOD | DUNN | SPRUCE

LAGOON | BRIMSTONE | SAFARI | OLIVE | PINTO | BARK

PICKLE | PAMPAS | FRINGE | DOLPHINE GREY | GRIZZLY

NCS
Can be tinted to a wide range of colours.

Apply @
6m² / L / Per coat

MEDIUM TEXTURE



Apply @
4m² / L / Per coat

COARSE TEXTURE



Due to the printing process, colours may vary from the actual paint colours.

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

Grit

WEATHERPROOF
MATT TEXTURE



Where to use?

Suitably primed new and previously painted stable cement plaster, concrete, porous brickwork, fibre-cement and gypsum plaster.

Can be tinted to a wide range of colours. NCS

15 YEAR QUALITY GUARANTEE SINCE 1985

Apply @

6m² / L / Per coat

Matt texture finish.
Bridge fine hairline cracks to prevent moisture ingress
Hides minor imperfections
UV and moisture resistant

LEAF
MEADOW
CASHEW
BEIGE
GOLD
WHITE
ARMOR
FORENOON
STORM
SMOKE
CARAMEL
BAMBOO
COBBLER
COVE
DUNE
TUSCAN
VALLEY ROCK
MOCCA

For a complete product range, data specifications & distribution, please visit • **www.lamininpaints.co.za**

Due to the printing process, colours may vary from the actual paint

Ap Ex

PREMIUM
ROOF COATING

- Low sheen finish
- UV and moisture resistant
- Low dirt pickup
- Dry film anti mould and fungal protection
- Colourfast



standard colours available in **RuBon** liquid rubber

DARK BROWN
BURGUNDY
MOSS GREEN
CHARCOAL
BLACK
TERRACOTTA
RED
CAPE GREEN
GREY
WHALE
DENIM
CLOUDY SUN
SHADOW BLACK
AUTUMN WIND
KAROO DUST
BLUE GREY
FIRE RED
NORTHERN SKY
GRANITE
FOREST TOP

15 YEAR QUALITY GUARANTEE SINCE 1961

Apply @
6m² / L / Per coat

Where to use?
Suitably primed new and previously painted stable galvanised, tile and clay pitched roofs.

Due to the printing process, colours may vary from the actual paint

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Roof & Pave

SMOOTH MATT COLOURFAST ROOF COATING

Dries to a smooth matt finish

Hides minor imperfections

Colourfast

UV and moisture resistant

Direct application to dry and stable paving

Regular maintenance coats might be required depending on traffic and conditions

Quality guarantee does not apply to application on floors, paving and pots

12 YEAR QUALITY GUARANTEE SINCE 1951

Apply @


6m² / L / Per coat





Where to use?

Suitably primed new and previously painted stable galvanised, tile and clay pitched roofs.
Dry cementitious paving, cobble stones and garden pots.

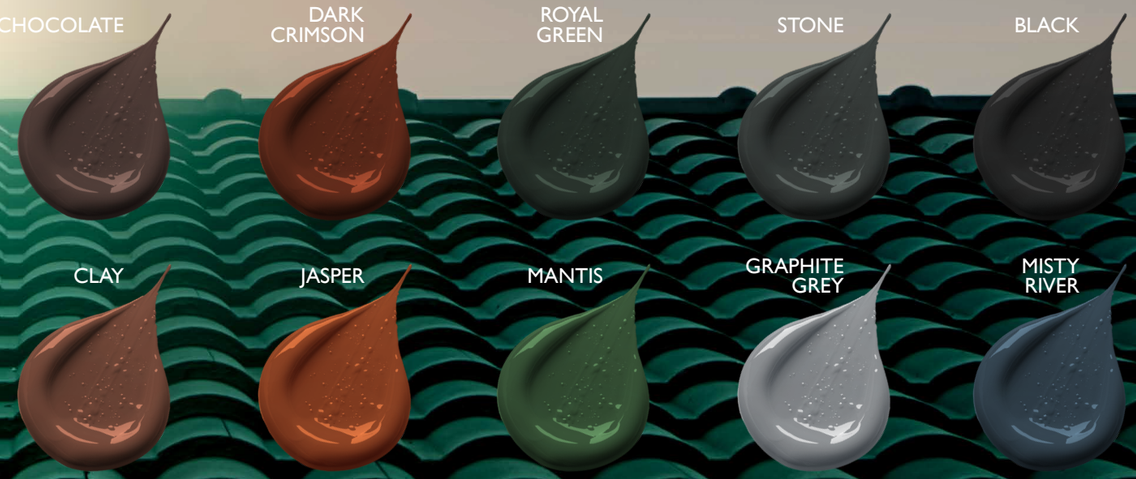

Due to the printing process, colours may vary from the actual paint

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Skin

Interior & exterior walls & ceilings
All purpose – primer / undercoat / topcoat if applied over dry and porous surfaces
For long term stability and durability apply **EkoPrime**
Dries to a smooth waterproof matt finish

AGRÉMENT SOUTH AFRICA

LAMININ® PAINTS



Apply @

6-8m²/ L / Per coat

Where to use?

Suitably primed new and previously painted stable cement plaster, concrete, porous brickwork, fibre-cement and gypsum plaster.

12 YEAR QUALITY GUARANTEE SINCE 1917

WINE BERRY	BRUISED WINE	ORANGE SKIN	MARS	CINNAMON	PAPYRUS
NECTAR CREAM	SCONE	WHEAT	BUTTERSCOTCH	FEATHERED GOLD	BROKEN WHITE
SHADY AMAZON	SEASONING	PALM	PRAIRIE DUST	CANARY	MESSA TAN
DEEP PURPLE	LATE NIGHT	ROCK SOLID	FOSSIL	STONE HENGE	LIBERIA
FLAMINGO	DEVINE GREEN	OCEAN MOTION	BLUE WING	BRIGHT BLUE	KIDZ CLAY
LIME	KAROO SAND	STUCCO	CAMEL HAIR	PEBBLE	BRIGHT RED

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Due to the printing process, colours may vary from the actual paint

Waterproof & rubberizing

top coats for roofs & exterior walls

15 YEAR

Apply @
5m² / L / Per coat

12 YEAR

Apply @
4-5m² / L / Per coat

15 YEAR

Apply @
10m² / L / Per coat



FIBRE REINFORCED

HydroFlex

UV resistant highly flexible membrane free waterproofing acrylic
Ideal for parapets, walls & roofs
Apply @ 4 sqm/L

WaterProof

Flexible membrane free waterproofing acrylic
Ideal for parapets, walls & roofs
Apply @ 2-3 sqm/L

& sealers

WITH MEMBRANE

HydroSeal

UV resistant highly flexible waterproofing acrylic
Long term durability
Apply @ 6 sqm/L


EkoSeal

Flexible acrylic waterproofing acrylic.
Apply @ 2-3 sqm/L

BloKit

Water based bitumen waterproof and sealing compound.
Excellent ponding capabilities.
Non toxic.
2-3 sqm/L



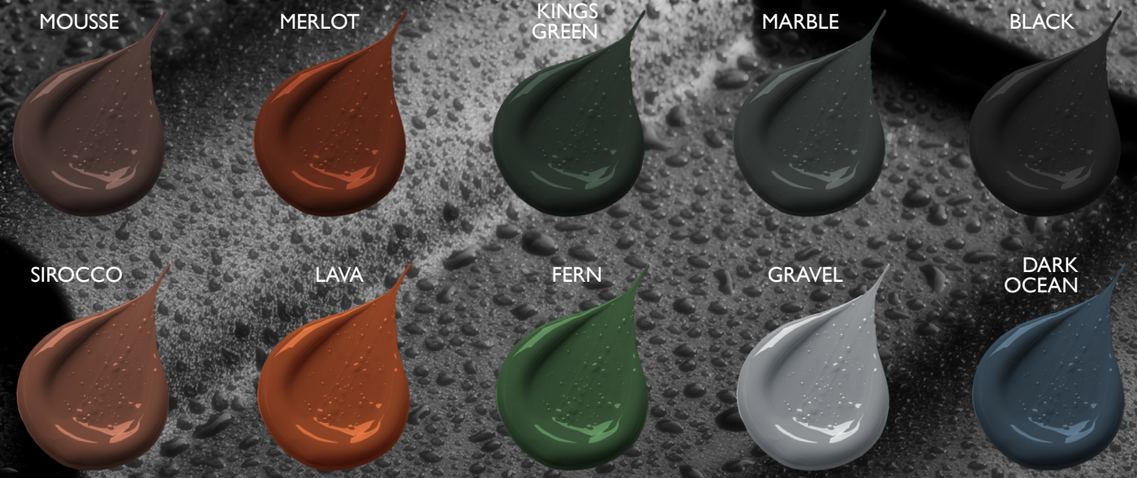

TopSeal standard colours

NCS Can be tinted to a wide range of colours.

Due to the printing process, colours may vary from the actual paint

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

ALKYD Coatings

Where **smooth durability** is required



HiGloss

Super gloss
for interior and exterior use
Apply @ 10 - 12 sqm/L

Shine

Medium gloss
for interior and exterior use
Apply @ 8 - 10 sqm/L

NonDrip

Polyurethane based heavy duty coating
for interior use
Apply @ 8 - 10 sqm/L

GeLo

Non-drip medium sheen
for interior and exterior use
Apply @ 10 sqm/L

EggShell

Matt finish for interior use
Apply @ 8 sqm/L

BRONZE
BURGUNDY
BRILLIANT GREEN
GOLDEN BROWN
GOLDEN YELLOW
NIGHT BLUE
PWD BROWN
SIGNAL RED
DARK GREY
BLACK
WHITE
MEDIUM GREY

NCS Can be tinted to a wide range of colours.

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

Due to the printing process, colours may vary from the actual paint

water based

Direct to Metal

Quick dry, heavy duty, corrosive resistant primer / undercoat / topcoat

Also available in solvent based.

Where to use?

Stable mild and galvanized steel surfaces.

Apply @

8-10m² / L / Per coat

NCS Can be tinted to a wide range of colours.



For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

SILVER ALUMINIUM
I.H RED
LISTER GREEN
M.F RED
J.D GREEN
WINDSOR GREEN
WHITE
GOLDEN YELLOW
J.D YELLOW
CATERPILLAR YELLOW
SIGNAL RED
MERC CREAM
BLACK
DARK ADMIRALTY GREY
M.F GREY
FIAT ORANGE
P.O RED
PWD BROWN
CLAAS GREEN
FORD TRACTOR GREY
COSMOS BLUE
FORD TRACTOR BLUE
NEW LANDINI BLUE

solvent based

Quick Dry Enamel

Dries to a heavy duty gloss finish.

Apply @

8-10m² / L / Per coat

Where to use?

Suitably primed new and previously painted stable mild-, galvanised steel and wood.

Due to the printing process, colours may vary from the actual paint

FloorAlkyd

Stoep enamel
Good flow and levelling
Direct application
Apply @ 8 sqm/L

PolyAlkyd

Heavy duty polyurethane based coating
Excellent flow and levelling
Direct application
Apply @ 10-12 sqm/L

RoadMark

Abrasive resistant
Quick dry
For tar, brick and concrete surfaces
Direct application
Apply @ 4 sqm/L



GREEN
DARK GREY
TERRACOTTA
MEDIUM GREY
STOEP RED
LIGHT GREY
WHITE
BLACK
YELLOW
RED

FLOOR COATINGS

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

WOOD ALL

Varnishes & Sealers

*Available in: Clear, Teak, Imbuia, Mahogany and Meranti.

HydroVar

Water based varnish
Non yellowing
Fast drying & mar resistant
Excellent flow and levelling
Apply @ 12 sqm/L

Int/Ext Varnish

Multi-purpose
Interior & exterior wood varnish
UV & weather resistant
Smooth gloss finish
Apply @ 10-12 sqm/L

PolyFloor

Floor varnish
Heavy duty Polyurethane based
Excellent flow & levelling
Direct application
Apply @ 10-12 sqm/L

UvProof

Exterior varnish
UV protected
Smooth high gloss finish
Long life
Apply @ 10-12 sqm/L

Wood Preserve

Penetrating sealer
Protects & preserves exterior wood
Deep penetrating
Does not peel, crack or chip
Apply @ 10-14 sqm/L

PolyDure

Interior varnish
Polyurethane based heavy duty
Excellent flow & levelling
Long life
Apply @ 10-12 sqm/L

EzVar *

Gloss varnish
Interior & exterior use
General purpose wood varnish
Apply @ 8-10 sqm/L



For **plaster repair** use **HydroKey** cement additive.

Improves drying time, flexural, tensile strength and resilience of cementitious and gypsum products.

Resists water penetration and movement through substrates.



Apply **deep penetrating PlasterPrime** for superior moisture and alkaline resistance.

Water-based **PlasterSeal** over dry and porous surfaces for ease of application.

Apply @
8-10m² / L / Per coat





Also available as **EkoPrime** solvent or water-based

Skim your wall to perfection

Excellent filling to even out imperfections. Direct application to a clean, sound and dry surface.

Premixed and ready to use acrylic based skimming compound.

Provides a smooth and uniform surface for a high quality finish.



Apply @
2-3m²/Kg/coat

PREPATORY COATINGS
FIRST

To block out unwanted colours & to improve adhesion over previously painted stable surfaces, apply **Universal UnderCoat.**

Available as a water-based option for ease of application.

Can be applied over aged alkyd systems.

Apply @
8-10m² / L / Per coat





Also available as **EkoCoat** solvent

For a complete product range, data specifications & distribution, please visit • **www.laminincoatings.co.za**

Exterior Walls

Superior moisture tolerance

DamProof

Water based plaster primer
Exceptional alkaline resistance
Light grey coloured to ease preparation
Alternative to alkyd based plaster primer
Apply @ 8-10sqm/L Per Coat

DampCure

Deep penetrating moisture tolerant
alkyd plaster primer
Moisture tolerant up to 30%, allows for
early priming of new cement plaster
Apply @ 10sqm/L

Also Alkyd PlasterPrime or PlasterSeal

Fine hairline cracks

HydroFlex

UV resistant highly flexible
fibre reinforced membrane free
waterproofing acrylic
Ideal for parapets, walls & roofs
Apply @ 4 sqm/L

WaterProof

Flexible fibre reinforced membrane free
waterproofing acrylic
Ideal for parapets, walls & roofs
Apply @ 2-3 sqm/L

EFFLORESCENCE is the powdery white salt deposit left on masonry surfaces (concrete, brick, stucco) after water evaporates. It typically acts as a severe, destructive force on paint finishes and presents as a cosmetic issue but quickly escalates to causing physical damage by breaking the adhesion between the paint and the substrate.

Efflorescence leads to:

Peeling, flaking or blistering: As water carries salts through the masonry and evaporates behind the paint film, the salt crystals grow. The pressure from these growing crystals forces the paint away from the surface, causing it to peel, bubble (blister), or flake off, particularly with non-breathable paints.

Adhesion Failure: The salt residue creates a powdery, "friable" base. Paint applied over active efflorescence will not stick properly, leading to premature failure of the paint system.

Unsightly staining and discolouration: The most immediate sign is a white, crusty or powdery deposit on top of the paint. In addition to the white stains, moisture can cause dark, damp patches, giving the surface a patchy, discoloured appearance.

Surface degradation: The alkaline salts can react with the paint and the substrate, weakening the mortar and concrete over time.

Saponification (chemical attack): If an oil-based or alkyd paint is applied over masonry with high alkali levels, a chemical reaction known as saponification can occur, where the paint turns into a soft, soapy or sticky mess that fails to dry.

Important note on address:

Simply cleaning the white powder and repainting will not necessarily be successful. The salts might reappear. You must treat the underlying moisture issue (the root cause) first, clean the efflorescence, allow the surface to dry fully (below 15% moisture content measured with a proto meter or below 5% measured with a pin type moisture meter), and then use a breathable and alkali-resistant masonry paint.

For a complete product range, data specifications & distribution, please visit • www.laminincoatings.co.za

Roofs & Trims

Tiles & Clay

BondAll

Deep penetrating acrylic based bonding liquid
Ideal for dry and porous clay and cementitious surfaces
Apply @ 10sqm/L

Galvanized & Chromadek

HydroEtch

Multi surface acrylic based primer/undercoat for mild- and galvanised steel, PVC, glass, ceramic wall tiles and various non- penetrating surfaces
Corrosive resistant
Apply @ 8sqm/L

Mild Steel

MsPrime

Normal dry rust resistant alkyd primer and undercoat
Anti-corrosive etching primer and undercoat for mild steel surfaces
Apply @ 8sqm/L

QDPrime

Quick dry rust resistant alkyd primer and undercoat for mild steel surfaces
Corrosive resistant
Apply @ 7-8 sqm/L

and HydroEtch

Wood

WoodPrime

Deep penetrating alkyd wood primer, sealer and undercoat for hard wood, soft wood and chipboard
Apply @ 8sqm/L

Fibre Cement & Nutec

PlasterSeal

Acrylic primer, sealer and undercoat
For dry and porous cementitious surfaces
Alternative to traditional alkyd plaster primers
Apply @ 10sqm/L

PREPATORY COATINGS
FIRST